



Dell Vostro 1400 Screen Replacement

Replacing the screen on Dell Vostro 1400.

Written By: David Hogg



INTRODUCTION

This guide will show you the proper steps to replace your screen on your Dell Vostro 1400



TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



⚠ Be sure the power is off and all cables are unplugged from the device before starting.


- After flipping over the laptop, the battery is on the bottom side of the laptop.
- Find the tabs on both the left and right side of the battery.

Step 2



- Push tabs toward the outside of the laptop until they lock in place.


Step 3

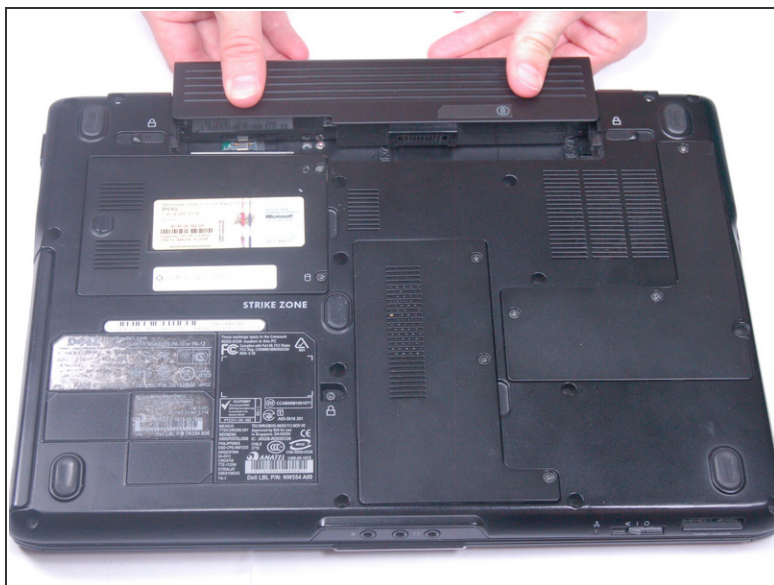

- Push the battery forward to eject it from the laptop.



Step 4 — Screen



 Please make sure your device is completely turned off and everything is unplugged from the device

- Open the laptop.

Step 5

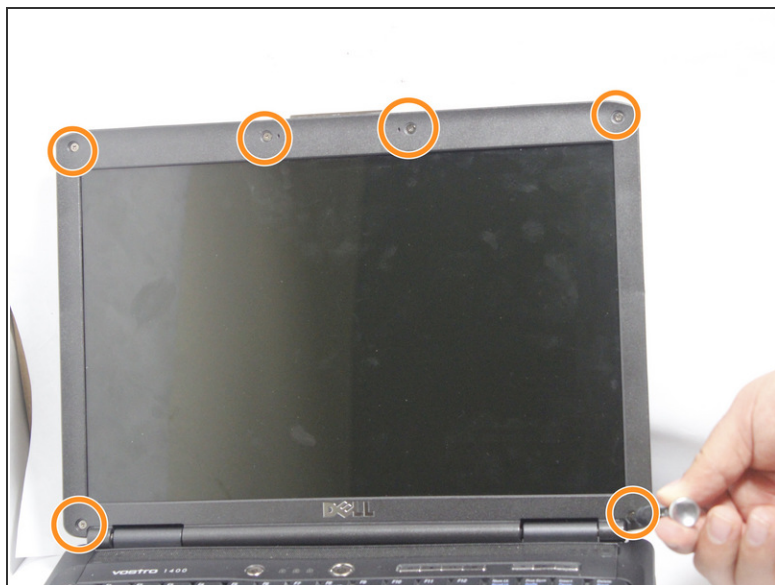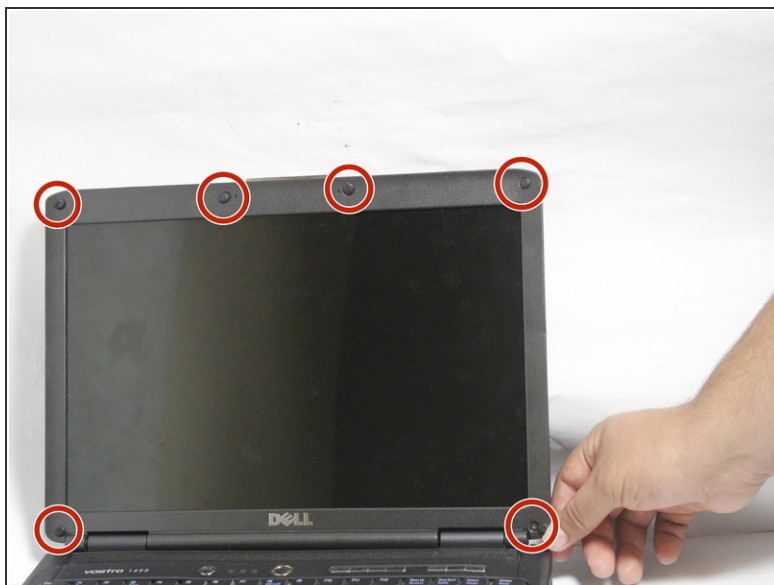

- Remove the 6 screw hole covers surrounding the screen.
- Remove the 6 screws that were underneath the screw covers.

Step 6




- Carefully remove the plastic surrounding the screen by pulling off, starting at the bottom.
- Remove the two (2.5mm x 5mm) screws at the top, by the camera.

Step 7



- Remove the two 5mm screws from the camera above the screen.
- Remove the two 5mm screws from the bottom of the screen.

Step 8

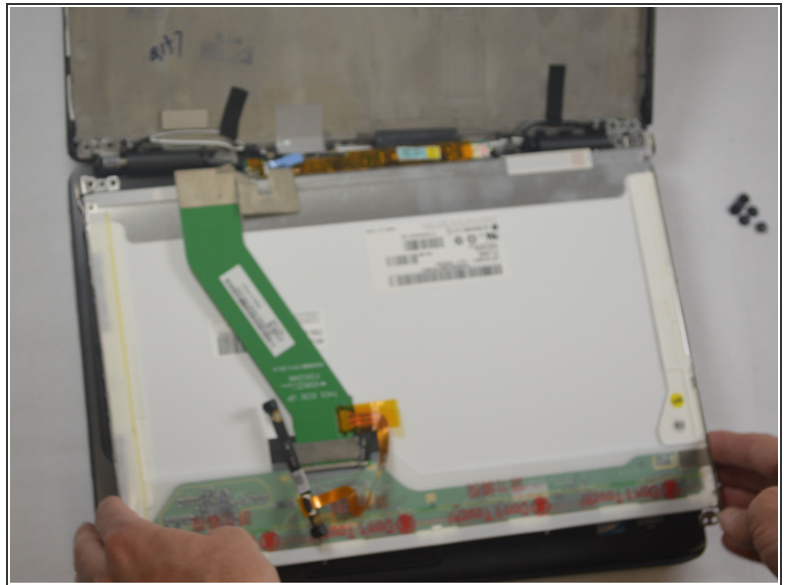

- Carefully remove the screen from the back cover.

Step 9





- Lift up the black tag holding the camera and cable together.
- Unplug the camera from the cable.

Step 10



- Unplug the two cables connected to the screen.

Step 11

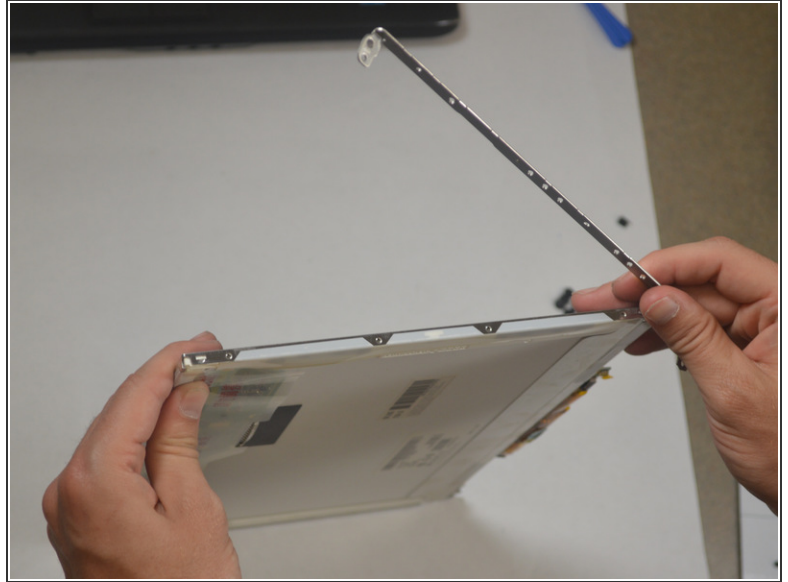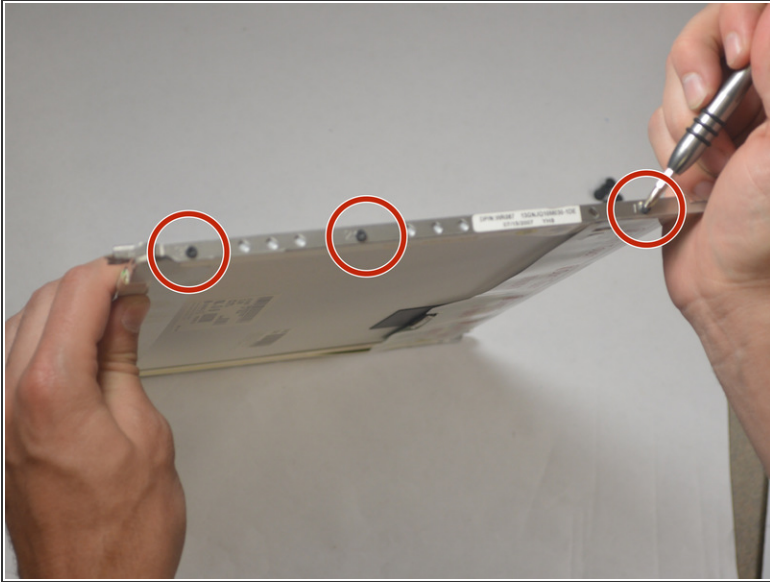

- Remove the six 3mm screws on each side of the screen.
- Remove the railing on each side of the screen.
- ⓘ The railing will be marked "L" for left side or "R" for the right. This should assist in reassembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 11:34:12 PM.